



LIQUISORB 7000™

THE NEW GOLD STANDARD FOR UV AND CHEMICAL STABILITY

Liquid Ultraviolet Light Stabilizer - A premium blend that provides excellent stability against color fade and shift due to sun and in-store lighting



USAGE

The recommended range of concentration in application is 0.2% to 0.4% depending on the substrate, processing conditions and long-term stability requirements.

KEY BENEFITS

- Superior broad spectrum coverage
- Provides superior protection to prevent color fade due to UV light induced degradation
- Easy pour liquid
- Ease of solubility - Solubilizes immediately and more efficiently
- High heat resistance
- Improved regulatory profile
- Improved burn profile
- Mitigates color shift in difficult fragrance categories




APPLICATION

Liquisorb 7000™ can be used for the following:

- Candles
- Waxes, both natural and synthetic
- Plastics
- Polyurethanes
- PP Injection Molding
- LDPE, HDPE Polymers
- PVC, PUR, PS Articles
- Polycetals, Polyamides
- O/S Based Reed Diffuser & plug-ins
- Coatings

LIQUISORB 7000™

Liquid Ultraviolet Light Stabilizer

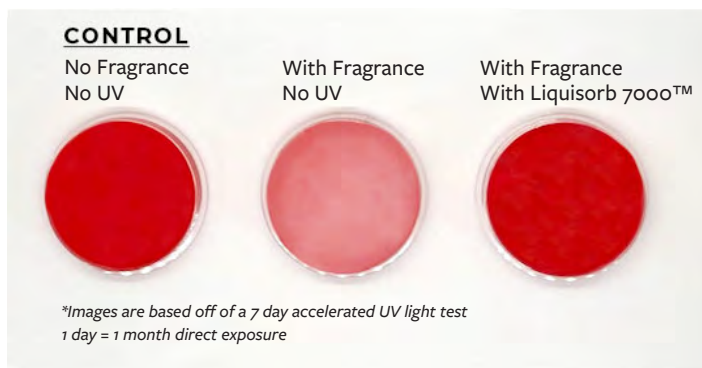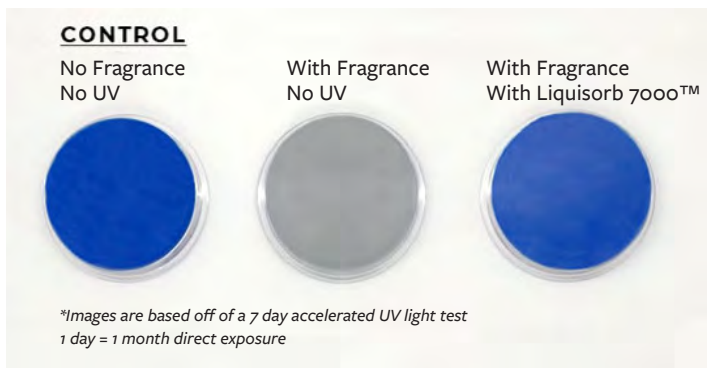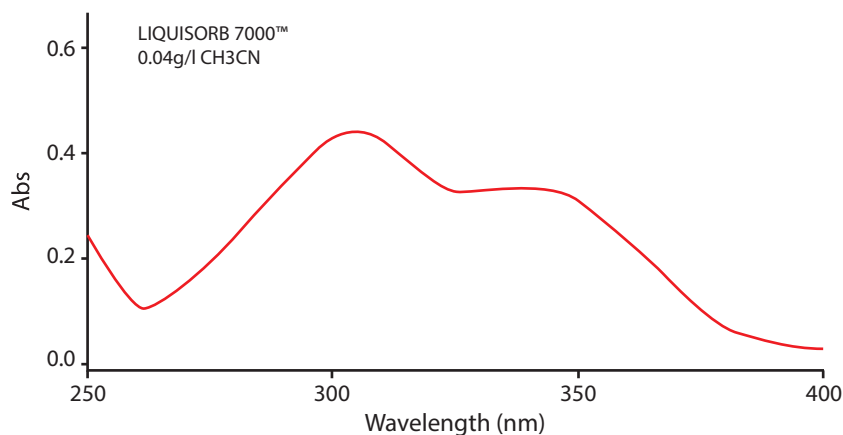

CHEMICAL AND PHYSICAL CHARACTERISTICS

Form	Pale yellow liquid
Odor	Slight-characteristic
Boiling Point	>300°C (572°F)
Flash Point	>150°C (302°F)
Viscosity	410 cps @ 25°C
Specific Gravity	1.00 g/cm ³
Solubility	25°C
Water	Insoluble
Methanol	Slightly soluble
Ethanol	Soluble
Acetone	Soluble